

ALPHA® 3355-VF

Water Soluble Organo-Flux

DESCRIPTION

ALPHA 3355-VF flux is a VOC-free modification of **ALPHA 3355-11** water soluble organic acid flux, used in the soldering of printed circuits and electronic hardware. This formulation produces exceptional solder wetting to a wide variety of metallic surfaces and is unsurpassed in water solubility for thorough removal of post soldering residues.

APPLICATION

ALPHA 3355-VF flux can be wave, spray or dip applied. Flux applicators and reservoir should be plastic or titanium only. Flux coated surfaces should be preheated to provide optimum wicking and solder joint formation. The degree of preheat is dependent on many variables, such as conveyor speed, type of components and substrates. Entering the solder wave with a topside temperature in the 210°F range is typical.

CONTROL: When using recirculation type flux applicators, the specific gravity of the flux should be checked periodically with a hydrometer and restored to specified value by the addition of DI water.

In time, debris and contaminants will accumulate in the flux. For consistent soldering performance, dispose of spent flux in accordance with Federal, State and local laws, rules and regulations periodically. After emptying used flux, the reservoir should be thoroughly cleaned with DI water. Refill the reservoir with fresh flux and allow a few minutes to stabilize before resuming solder operation.

RESIDUE REMOVAL: After soldering, **ALPHA 3355-VF** residues must be removed. Removal can be accomplished in multi-zone conveyerized in-line spray systems, automated batch spray systems (dishwashers) or multi-stage batch tank cleaning. Multiple zone in-line systems equipped with quality tap or conditioned water, an effective air knife and drying capacity can produce MIL-P-28809 ionic cleanliness levels.

ALPHA 520 saponifier is recommended for improving cleanliness levels in batch and in-line systems with limited cleaning capabilities. Incorporating a saponifier or neutralizer will assist the removal of flux residues, aqueous spot mask and other contaminants.


TECHNICAL DATA

Item	Typical Values	Item	Typical Values
Appearance	Clear reddish liquid	Flash Point	None
Solids Content, wt/wt	22.4%	Recommended Thinner	DI H ₂ O
Specific Gravity @ 25°C (77°F)	1.052 ± 0.005	Shelf Life (from Date of Mfg.)	720 days
% Halide	3.0	IPC J-STD-004 Designation	ORH1
pH (5% solution)	1.2	Packaging Size	1, 5 and 55 gallons
Pounds per Gallon	8.74		

ALPHA® 3355-VF

Water Soluble Organo-Flux

Specific Gravity VS Temperature (°C)

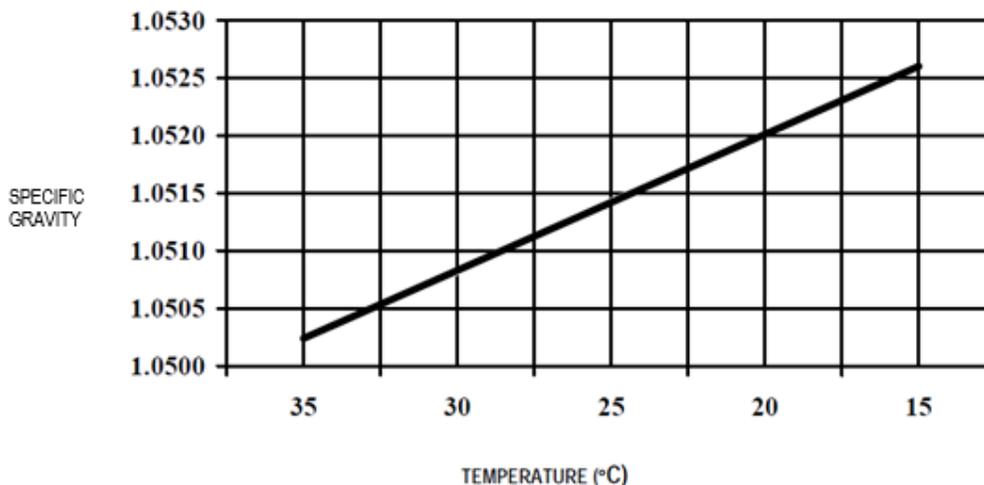

SAFETY

Please refer to the Safety Data Sheet as the primary source of health and safety information. The most recent version of the SDS is available from AlphaAssembly.com.

CONTACT INFORMATION

To confirm this is the most recent issue, please contact Alpha Assembly Solutions
AlphaAssembly.com

<p>North America 300 Atrium Drive Somerset, NJ 08873, USA 800.367.5460</p>	<p>Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 01483.758400</p>	<p>Asia 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100</p>
---	---	---

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency directory assistance Chemtrec 1 - 800 - 424 - 9300.

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OR MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any product defective at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect and consequential damages that may result from use of the products under conditions, and agrees to exonerate, indemnify and hold harmless MacDermid Incorporated therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in infringement of any patent rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

® Registered Trademark of MacDermid Performance Solutions.™ Trademark of MacDermid Performance Solutions.
© Platform Specialty Products Corporation and its subsidiaries 2016.